


U W X Y Z AA BB CC DD EE FF HH JJ LL MM NN PP RR SS TT UU WW

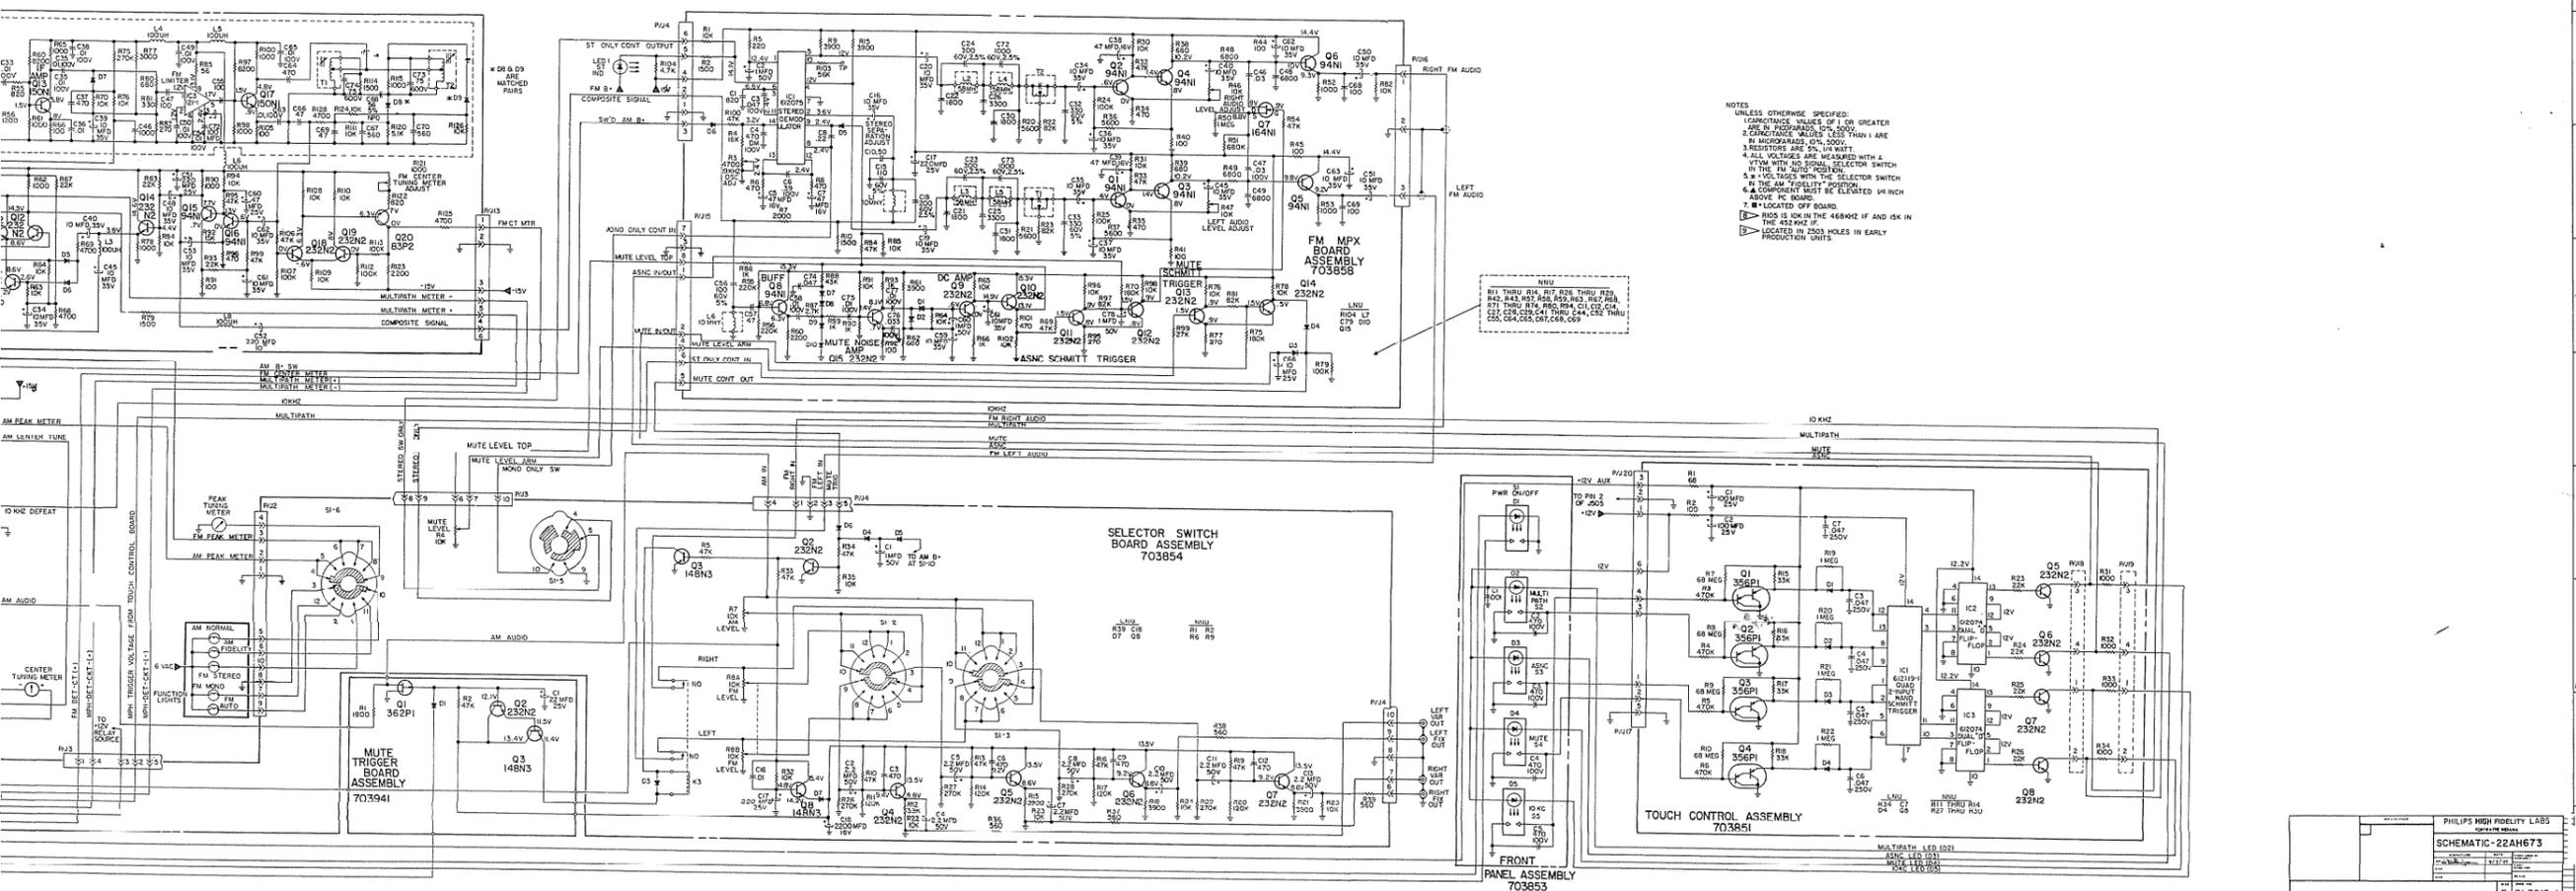

NOTES: UNLESS OTHERWISE SPECIFIED:
 1. CAPACITANCE VALUES OF 1 OR GREATER ARE IN PICOGRAMS (PK), 1000.
 2. CAPACITANCE VALUES LESS THAN 1 ARE IN MICROGRAMS (MK), 1000.
 3. RESISTORS ARE 5% IN VALUE.
 4. ALL VOLTAGES ARE MEASURED WITH A 10K OHM IMPEDANCE SELECTOR SWITCH IN THE FM AUTO POSITION.
 5. * VOLTAGES WITH THE SELECTOR SWITCH IN THE AM FIDELITY POSITION ABOVE PC BOARD.
 6. * COMPONENT MUST BE LEVELLED 1/4 INCH.
 7. * LOCATED OFF BOARD.
 8. * R105 IS OK IN THE 468KHZ IF AND ISK IN THE 402KHZ IF.
 9. * LOCATED IN 7505 HOLES IN EARLY PRODUCTION UNITS.

www.mbfreaks.nl
 www.mbservice.nl